



MODEL TL-5902

International size reference: 1/2AA, ER14252

TECHNICAL DATA



(Typical values @+25°C for batteries stored for one year or less)

- Nominal capacity @ 0.5 mA, to 2V 1.2 Ah
- Rated voltage 3.6 V
- Maximum recommended continuous current 50 mA
- Maximum pulse current capability 100 mA
- Weight 9.2g (0.324 oz)
- Volume 4.3 cc
- Operating temperature range -55°C to +85°C
- U.L. Component Recognition, MH 12193

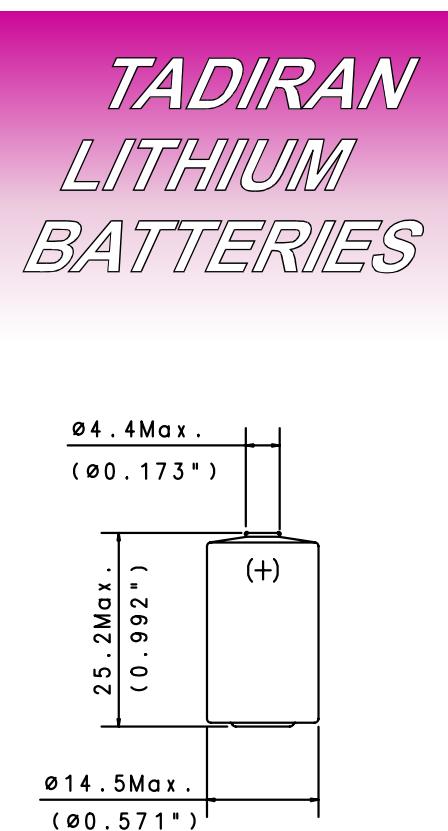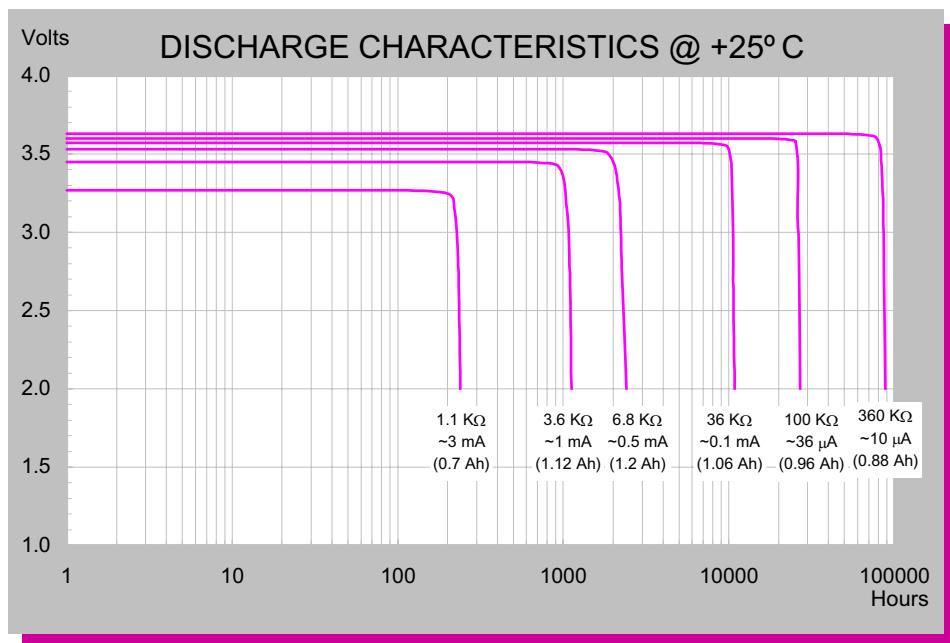

AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-5902-21500
SUFFIX- /T SOLDER TABS	15-5902-31500
SUFFIX- /P AXIAL PINS	15-5902-41500
SUFFIX- /PT2 RADIAL PINS	15-5902-36500
SUFFIX- /TP POLARIZED TABS	15-5902-52500
SUFFIX- /PT POLARIZED TABS	15-5902-53500

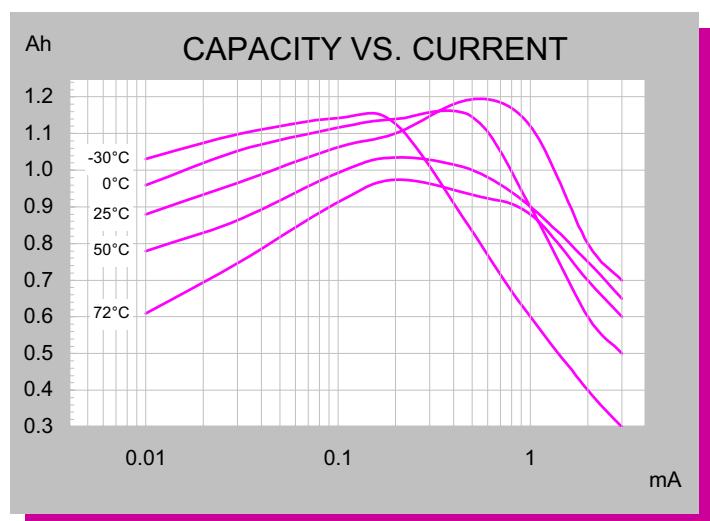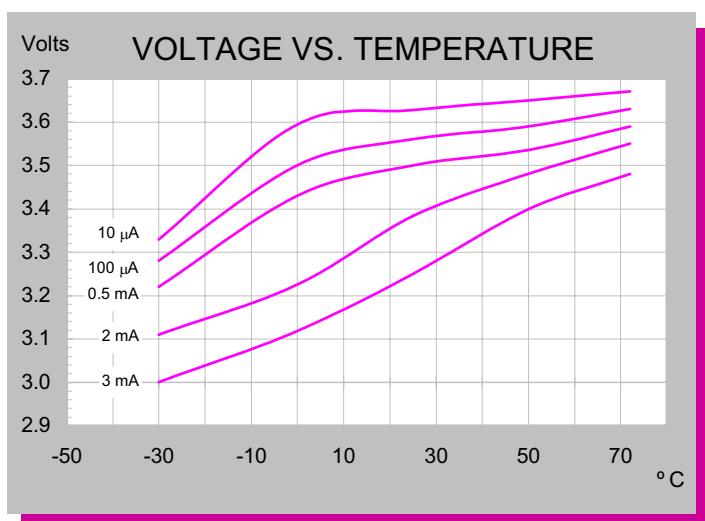

LITHIUM XTRA

Note: Any presentations in this data sheet concerning performance are for information purposes only and do not constitute warranties either expressed or implied, of future performance.

大豪电子
电话: 0755-83233025
<http://www.sz dahao.com>
<http://www.very-tec.com>

and are not construed as
Rev. B 03/03